


ONEC

WINTER READY - INDUSTRIAL - PORTABLE




POLAR BEAR SAFETY SHOWER

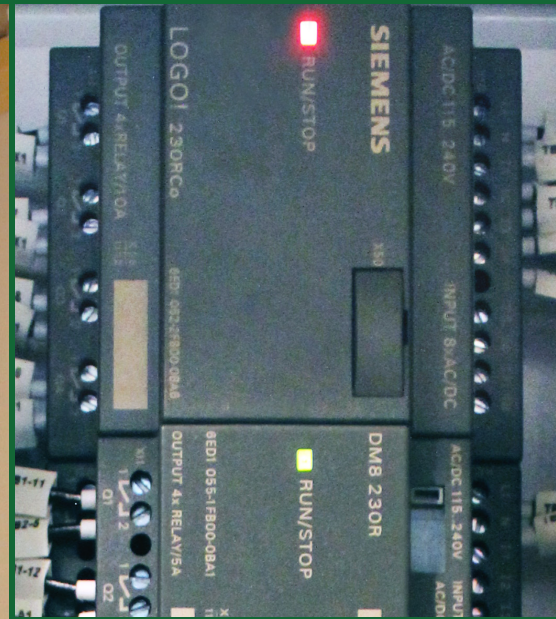


BUILT CANADA WINTER TOUGH.

PB-100 SKID BASE

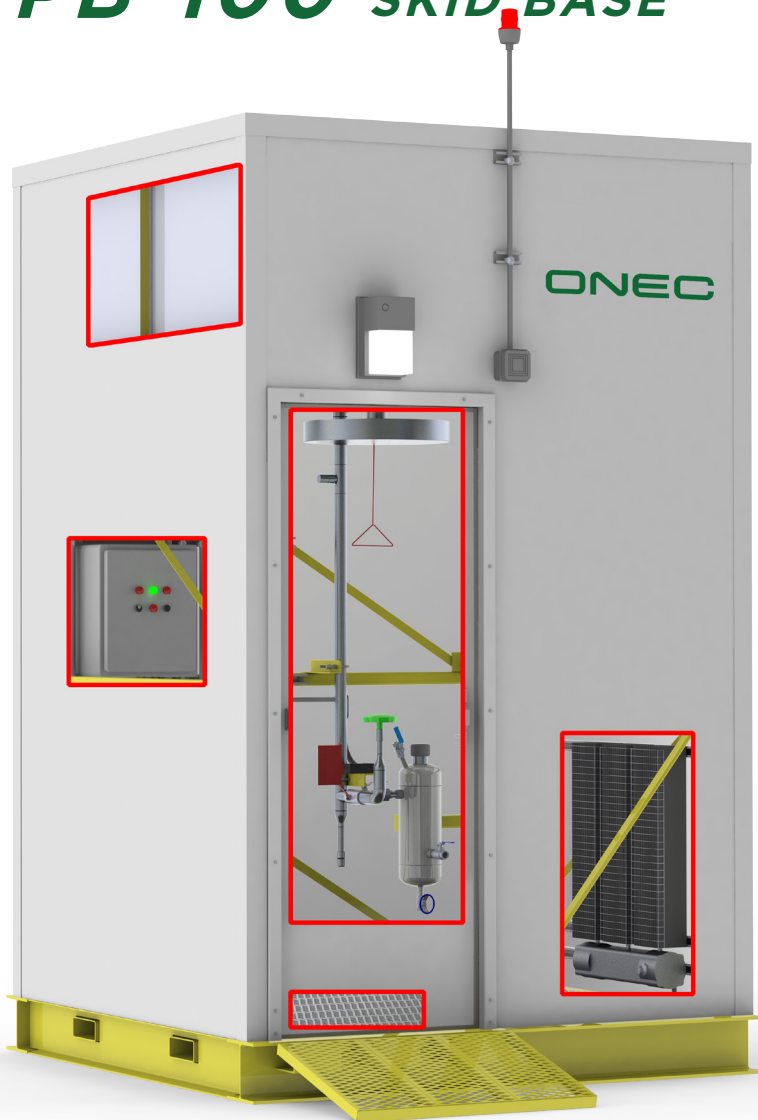


ONEC offers the best safety shower for Northern weather conditions. It is built tough. Safety and durability are the core concepts of this shower. It was designed from the ground up to function reliably every time.

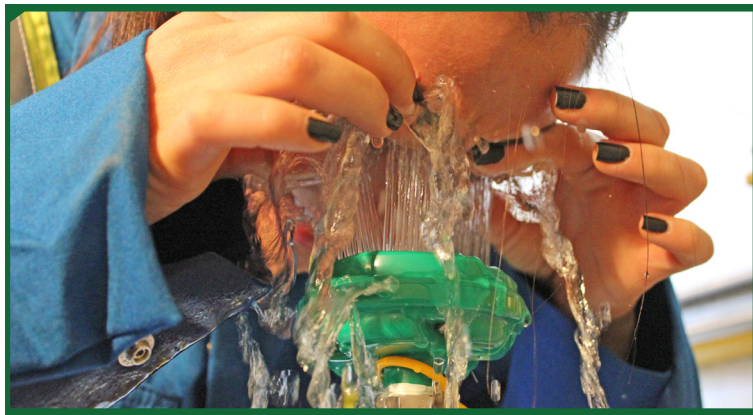

Easy access eyewash during operation.




Strobe signal is visible from far distances and alerts site personnel when in use.



Heated 500 gallon tank. Held firmly in place by building frame. Built to last.



Illuminated front entry way for dark conditions. Strobe light alerts site personnel that shower is in use.



Alarm horn alerts site personnel during the use of the eyewash or shower.



Double heavy duty, impact resistant inside lighting. Fully illuminated interior of the shower.



Industrial grade, all stainless, wide diameter high volume water surface area dispersal pattern.



Drench hose attachment allows easy cleaning of workers coveralls or equipment.



Water resistant controls for operations. Offsite ethernet or cellular monitoring available.



Immediately in front of the user with high visibility red flag paddle.



Chemical storage tank for filling, flushing and adding preservatives to the main tank.



Huge, water resistant heater keeps the shower toasty warm. Temperature adjustable.



Transport the safety shower easily with any standard fork lift style equipment.



Stable, non-slip high traction tread plate. ensures firm footing during all seasons.



Clog resistant drain with threaded outlet. Hose or pipe connection.

PB-100 TR TRAILER BASE



The PB-100 is suited for extremely cold outdoor conditions and is fully compliant with ANSI Z358.1 (American National Standard for Emergency Eyewash and Shower Equipment.) It provides 15 minutes of uninterrupted water supply.



Portable safety showers are in high demand because the site needs change all the time. You can move the PB-100 TR anywhere you want. The trailer base acts as a 500 gallon holding tank for used water. Drain it, hitch it and go.



Secure and safe hitch for securing the shower for travel.



Brake and signal lights are operated via standard trailer connections.




Level out the trailer using the four attached jacks. Also used for tilting the trailer during draining.



Draining the base frame is done with a simple 1/4 turn ball valve. Threaded for hose attachment.



**HIGH VISIBILITY LIGHTS
AND REFLECTOR TAPE**

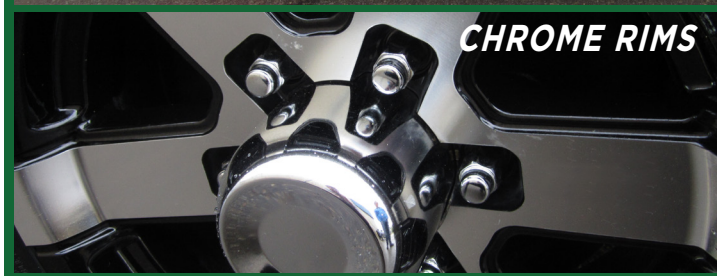

CHROME RIMS

PB-100 EX CLASS I, DIV I



PB-100 upgraded to PB-100 EX

Our customers are requesting hazardous location showers more than ever. The PB-100 EX model is the answer to this demand.



PB-100
Disconnect

PB-100 EX
Upgrade



PB-100
Lighting



PB-100 EX
Upgrade




PB-100
Electrical



PB-100 EX
Upgrade

Additional options available.

- A • LIFTING LUGS
- B • ROLL BAR BASE FRAME
- C • CLASSIFIED ELECTRICAL RATINGS
- D • SCADA & REMOTE MONITORING
- E • R32 INSULATION
- F • SHIPPING
- G • INSTALLATION
- H • FOOT PEDAL ACTUATOR
- I • TEMPERATURE / LEVEL DISPLAYS

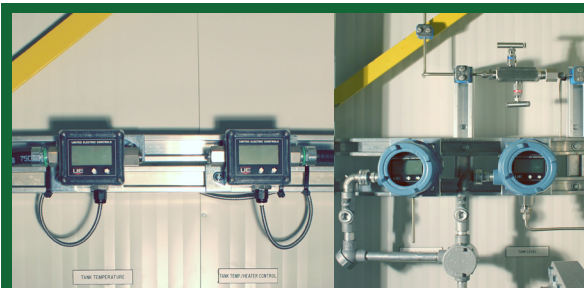

Temperature displays

PB-100 EX Upgrade

All ONEC Safety Showers are Alberta Building Code Part 10 Compliant.



PB-100

PB-100 EX

Dimensions: L 2,127mm x W 2,020mm x H 3,328mm (83.8" x 79.5" x 131")
 Weight Empty: 1,792 kg / (3,950 lbs.)
 Weight Full: 4,060 kg / (8950 lbs.)
 Tank Volume: 1,893 L / (500 ga.)
 Water Temp: Immersion Heater / 18°C-26°C (64°F-79°F)
 Preservation: Water preservation via chemical.
 Operation Time: 15 minutes of continuous water flow.
 Alarms: Shower, eyewash, tank & building temp.
 Connection: 208/240 VAC 30A
 Lighting: Auto. Interior / Manual or Auto. External
 Heat: Internal space heater
 Building: CSA A660 Certified



PB-100 TR

PB-100 TR EX

Dimensions: L 5,156mm x W 2,718mm x H 3,670mm (203" x 107" x 144.5")
 Weight Empty: 4,082 kg / (9,000 lbs.)
 Weight Full: 6,804 kg / (15,000 lbs.)
 Tank Volume: 1,893 L / (500 ga.)
 Sump Temp: Heat traced / 5°C-10°C (41°F-50°F)
 Tires / Rim: 235 / 16
 Jacks: 5,000 lb. rated, side winding, swivel

* Rental units available.

* Weight may vary based on configuration.

* Heights listed are to top of building.



**POLAR BEAR
SAFETY SHOWER**

ONEC

ONEC
3811 - 78 Avenue
Edmonton, AB

T6B 3N8, Canada
E: info@onecgroup.com
P: 780.440.0999